

LED Design UFO High-Bay Light



Better solutions for a Led Highbay Light

- IP65 water-proof**
- AC100-277V 50/60Hz**
- Easy Installation**
- 140Lm/w**



Options

Power	Color	Beam Angle
MEAN WELL DRIVER	3000K	50°
HBG series B: Dimmable 1-10V	4000K	90°
HBG series AB	5700K	120°
ELG series A: Standard		
ELG series B: Dimmable 0-10V		
ELG series DA: Dimmable DALI		


Application

Factories, Steel Mills, Steel Smelting Plants, Manufacturing Plants & Warehouses
 Farms and Industrial Installations, sport Facilities & Workshops, Storage Facilities & Warehouses
 Supermarkets & Department Stores, Showrooms, Design Centers & Galleries.


Specifications

Power	Lumen	Leds	CRI	Weight	Beam Angle
80W	11200Lm	LUMILEDS 3030	> 80	3.56kg	50°/90°/120°
100W	14000Lm	LUMILEDS 3030	> 80	3.56kg	50°/90°/120°
120W	16800Lm	LUMILEDS 3030	> 80	3.56kg	50°/90°/120°
150W	21000Lm	LUMILEDS 3030	> 80	3.75kg	50°/90°/120°
200W	28000Lm	LUMILEDS 3030	> 80	5.13kg	50°/90°/120°

Dimensions(mm)

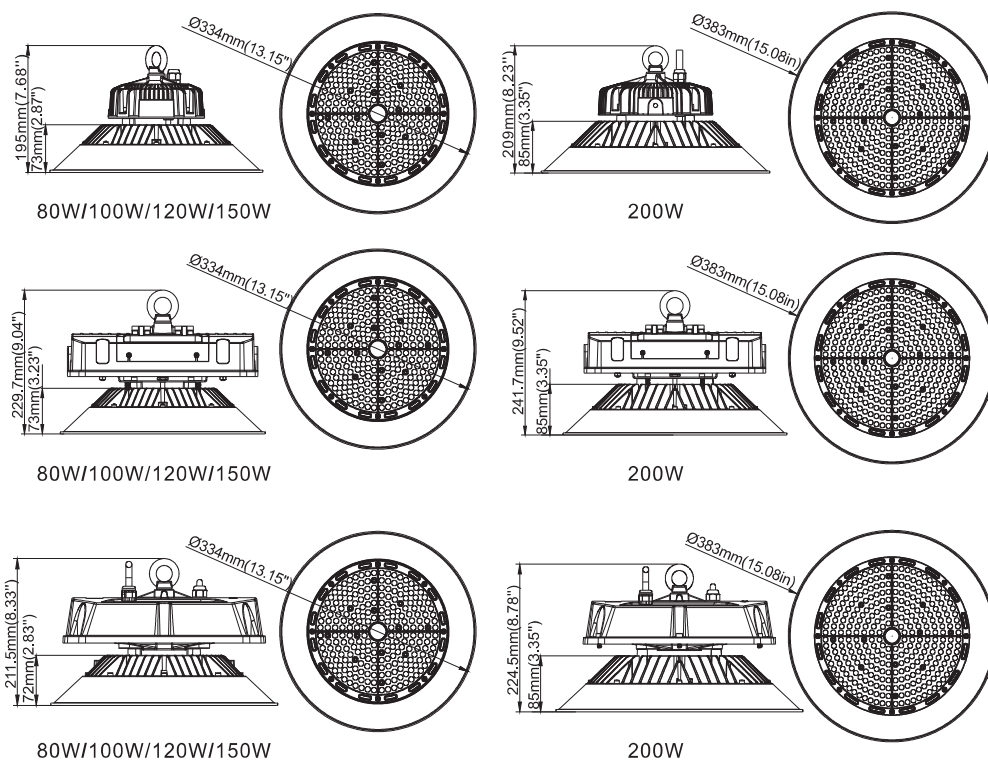

Photometry

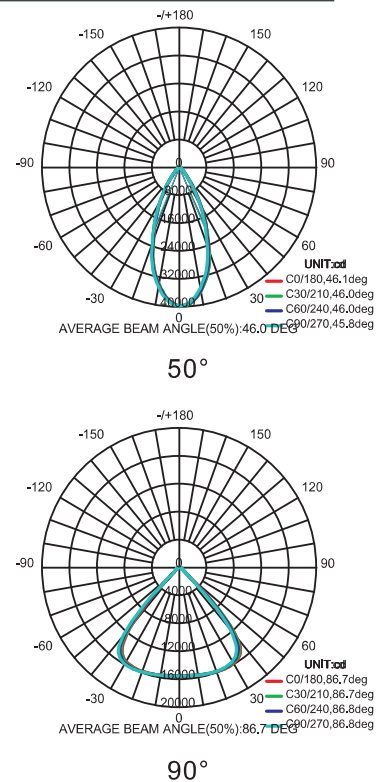

LED Design UFO High-Bay Light



Model Options



Installation and use

P1 Mounting Ring (Standard)

1

Power	D1
100W	10mm
150W	10mm
200W	10mm

2

3

Brown(Black)--- L
Blue(White)--- N
G/Y(Green)-- GND

P2 Mounting Bracket A

1

Power	D1	D2
100W	100mm	12mm
150W	100mm	12mm
200W	100mm	12mm

2

3

Brown(Black)--- L
Blue(White)--- N
G/Y(Green)-- GND

P3 Mounting Ring

1

Power	D1
100W	10mm
150W	10mm
200W	10mm

2a

3a

2b

3b

Brown(Black)--- L
Blue(White)--- N
G/Y(Green)--- GND

4b

P4 Mounting Bracket B

1

Power	D1	D2
100W	100mm	12mm
150W	100mm	12mm
200W	100mm	12mm

2

3

Brown(Black)--- L
Blue(White)--- N
G/Y(Green)--- GND

P5 Mounting Ring

1

Power	D1
100W	10mm
150W	10mm
200W	10mm

2

3

Brown(Black)--- L
Blue(White)--- N
G/Y(Green)--- GND

P6 Mounting Bracket C

1

Power	D1	D2
100W	100mm	12mm
150W	100mm	12mm
200W	100mm	12mm

2

3

Brown(Black)--- L
Blue(White)--- N
G/Y(Green)--- GND

Packing Spec

Item	Box			Carton		
	Measurement(mm)	Gross weight	Pcs/box	Measurement(mm)	Gross weight	Pcs/box
80W/100W	L415*W415*H290	4.72kg	1	/	/	/
120W/150W	L415*W415*H290	5.20kg	1	/	/	/
200W	L465*W465*H310	6.78kg	1	/	/	/